

FIELD OF APPLICATION

Overlock machines with air and thread saving device, chainstitch machines with stitch condensing

With connections and/or outputs for:

| | |
|------------------------|----------------|
| Thread tension release | (max. 3.0 A) |
| Chain/tape cutter | (max. 0.5 A) |
| Sewing foot lift | (max. 6.5/3 A) |
| Chain suction | (max. 3.0 A) |
| Chain blowing | (max. 3.0 A) |
| Needle cooling | (max. 0.5A) |

The total power of the outputs is to be limited to 96VA!
Power supply 24V=, max. 0.5A for further additional devices.

CHARACTERISTICS

The control has a digital touch panel for programming all parameters (functions, times, speeds, etc.). When a Variocontrol V820 control panel is connected, additional functions are possible, e. g. activation or deactivation of sewing foot lift, of the signal "chain blowing at the seam end", etc. (order nos. of the V810/V820 control panels see Special Accessories).

By means of the incorporated actuator, 12 speed stages can be activated. Stage 1 (positioning speed) and stage 12 (maximum speed) can be set. The maximum speed of the set value can be reduced by stages. The basic setting of the maximum speed is not affected. Stages 2...11 (intermediate speeds) adapt automatically to the respective maximum speed.

THE FOLLOWING FUNCTIONS ARE AVAILABLE AND CAN BE ADAPTED TO THE MACHINE:

- **SOFTSTART:** On / off; number of stitches and speed at the start of the seam can be selected (2 stitches / factory setting: 400 RPM).
- **BASIC POSITION:** Needle position at stop in the seam up/down.
- **BRAKING POWER AT MACHINE STANDSTILL:** Braking effect can be set.
- **SEWING FOOT LIFT:** At stop in the seam automatic / by pedal, after thread trimming automatic / by pedal, start delay from lifted sewing foot can be set.
- **CHAIN BLOWING:** On / off
- **CHAIN SUCTION:** At the start of the seam on / off, at the seam end on / off.
- **THREAD TENSION RELEASE:** At the start of the seam on / off, at the seam end on / off.
- **CHAIN/TAPE CUTTER:** At the start of the seam with stitch counting on / off, at the seam end with stitch counting on / off.
- **SPEED RANGE:** 70 RPM up to 9900 RPM (depending on machine).
- **SPEED LIMITATION:** Can be varied during machine run and at intermediate stop.

SWITCHING FUNCTIONS WHEN USING A VARIOCONTROL V810/V820:

V810

- Chain suction at the start of the seam and/or at the seam end on / off
- Chain/tape cutter at the start of the seam and/or at the seam end on / off
- Automatic sewing foot lift at stop in the seam / - after thread trimming
- 2 pushbuttons which can be set with different input functions

V820

- Chain suction at the start of the seam and/or at the seam end on / off
- Chain/tape cutter at the start of the seam and/or at the seam end on / off
- Automatic sewing foot lift at stop in the seam / after thread trimming
- Basic position of the needle at stop in the seam up / down
- Stitch counting seam forward / backward / off
- Light barrier function uncovered-covered / covered-uncovered / off
- Chain blowing at the seam end on / off
- Function key programmable
- 2 pushbuttons which can be set with different input functions

A PUSHBUTTON FOR THE FOLLOWING FUNCTION CAN BE CONNECTED:

- **MANUAL CHAIN/TAPE CUTTER**

IF THE LIGHT BARRIER MODULE IS NOT CONNECTED, THE LIGHT BARRIER INPUT CAN BE USED FOR THE FOLLOWING TOUCH AND/OR SWITCHING FUNCTIONS:

- **NEEDLE POSITION UP/DOWN**
- **NEEDLE POSITION UP**
- **SINGLE STITCH:** Basting stitch
- **FULL STITCH**
- **NEEDLE TO POSITION 2**
- **RESET STITCH COUNTER**
- **SEWING FOOT UP WITH PEDAL IN POS. 0 (neutral)**
- **MACHINE RUN BLOCKAGE:** Positioned stop; break contact [N.C.] / make contact [N.O.] selectable
- **MACHINE RUN BLOCKAGE:** Unpositioned stop; break contact [N.C.] / make contact [N.O.] selectable
- **AUTOMATIC SPEED**
- **LIMITED SPEED WHEN USING THE PEDAL**

▪ **UNIT CONSISTING OF:**

- | | |
|---|---|
| <ul style="list-style-type: none"> 1 induction motor with electromagnetic clutch type V....*1) 1 control box type 2A82MV2309 with power pack N30 1 position transmitter type P5-2 1 reflection light barrier module LSM001A | <ul style="list-style-type: none"> 1 set of standard accessories B10 consisting of: 1 belt guard, complete (for pulleys up to 132 mmØ) 1 set of hardware 1 motor mounting foot 1 bracket 1 and 2, short 1 documentation 1 set of accessories Z3 consisting of: 1 pitman rod, complete |
|---|---|
- 1 pulley DIN42692-L (size according to request) *2)

▪ **SPECIAL ACCESSORIES:**

| SPECIAL ACCESSORIES, AGAINST EXTRA CHARGE: | Part No. |
|---|---|
| Control panel Variocontrol V810 with 9-pole/25-pole adapter | 5970153 |
| Control panel Variocontrol V820 with 9-pole/25-pole adapter | 5970154 |
| Reflection light barrier module LSM001A | 6100028 |
| Belt guard for pulleys up to 180 mm Ø | 7960012 |
| Solenoid type EM1...(for e. g. sewing foot lift) | available versions see specification "solenoids" |
| Extension cable for external actuator, approx. 750 mm long, complete with plug and socket connector | 1111845 |
| Extension cable for external actuator, approx. 1500 mm long, complete with plug and socket connector | 1111787 |
| 5-pin plug with locking screw for the connection of another external actuator | 0501278 |
| External actuator type EB301 with approx. 250 mm connecting cable and 5-pin plug with locking screw | 4170011 |
| External actuator type EB302 (softer spring) with approx. 250 mm connecting cable and 5-pin plug with locking screw | 4170012 |
| Foot control type FB301 (one pedal) for standing operation with approx. 1400 mm connecting cable and plug | 4170013 |
| Foot control type FB302 (three pedals) for standing operation with approx. 1400 mm connecting cable and plug | 4170018 |
| Potential equalization cord 700 mm long, LIY 2.5 mm ² , grey with forked cable brackets on both sides | 1100313 |
| Fitting piece for position transmitter | 0300019 |
| Extension cable for position transmitter P5-..., approx. 1100 mm long, complete with plug and socket connector | 1111584 |
| Extension cable for position transmitter P5-..., approx. 315 mm long, complete with plug and socket connector | 1111229 |
| Knee switch type KN3 (pushbutton) with cord of approx. 950 mm length without plug for activating the functions mentioned overleaf | 5870013 |
| Sewing light transformer | please indicate line voltage and sewing light voltage (6.3V or 12V) |
| 6-pin plug with locking screw (MAS 6100) B4, B5 | 0500703 |
| 6-pin plug (MES 60) B6 | 0500457 |
| 7-pin plug with locking screw (MAS 7100S) B18 | 0502474 |
| 10-pin plug (MES 100) B3 | 0500357 |

*1) Available motors see next page

*2) The following sizes are available: B58-L, B63-L, B67-L, B71-L, B75-L, B80-L, B85-L, B90-L, B95-L, B100-L, B106-L, B112-L, B118-L, B125-L, B132-L, B140-L

Note: Select the pulley such that the maximum speed of the machine corresponds to the speed indicated on the motor nameplate!



FRANKL & KIRCHNER GMBH & CO KG
SCHEFFELSTRASSE 73 · D-68723 SCHWETZINGEN
TEL.: (06202)2020 · TELEFAX: (06202)202115
email: info@efka.net
http://www.efka.net




OF AMERICA, INC.
3715 NORTHCREST ROAD · SUITE 10
ATLANTA · GEORGIA 30340
PHONE: (770)457-7006 · TELEFAX: (770)458-3899
email: efkaus@aol.com



ELECTRONIC MOTORS SINGAPORE PTE. LTD.
67, AYER RAJAH CRESCENT 05-03
SINGAPORE 139950
PHONE: 7772459 · TELEFAX: 7771048
email: efkaems@cyberway.com.sg

▪ AVAILABLE MOTORS

Example For Ordering VARIOSTOP Positioning Drives (Series 82)

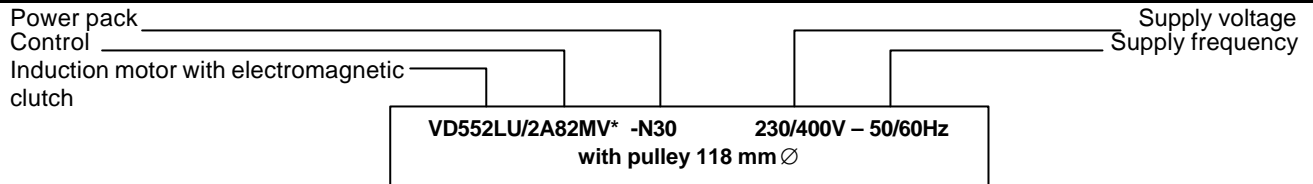


* Besides the type designation, the control nameplate indicates the respective state of development (e. g. 2A82MV...Y1) and the program number (e. g. 2A82MV2309..). The state of development is only required in the case of technical inquiries or repairs.

Induction Motors With Electromagnetic Clutch

| Type | Power rating (W) | Speed (RPM) | Frequency (Hz) | Type | Power rating (W) | Speed (RPM) | Frequency (Hz) | Type | Power rating (W) | Speed (RPM) | Frequency (Hz) |
|-------------------------------|------------------|---------------|----------------|--|------------------|---------------|----------------|------------------|------------------|---------------|----------------|
| VD374 VD374U VD374LU | 370 | 1400/ 1700 | 50/60 | VD742 VD742U VD742* VD742U* VD742LU* | 740 | 2800/ 3400 | 50/60 | VE374 VE374LU | 370 | 1400/ 1700 | 50/60 |
| VD552 VD550LU VD552* | 550 | 2800/ 3400 | 50/60 | VD1102* VD1102U* | 1100 | 2800/ 3400 | 50/60 | VE502 VE502LU | 500 | 2900/ 3500 | 50/60 |
| VD554* VD554U* VD554LU* | 550 | 1400/ 1700 | 50/60 | | | | | VE602 VE602LU | 600 | 2900/ 3500 | 50/60 |

* in series with reinforced clutch

Type Code For Induction Motors With Electromagnetic Clutch

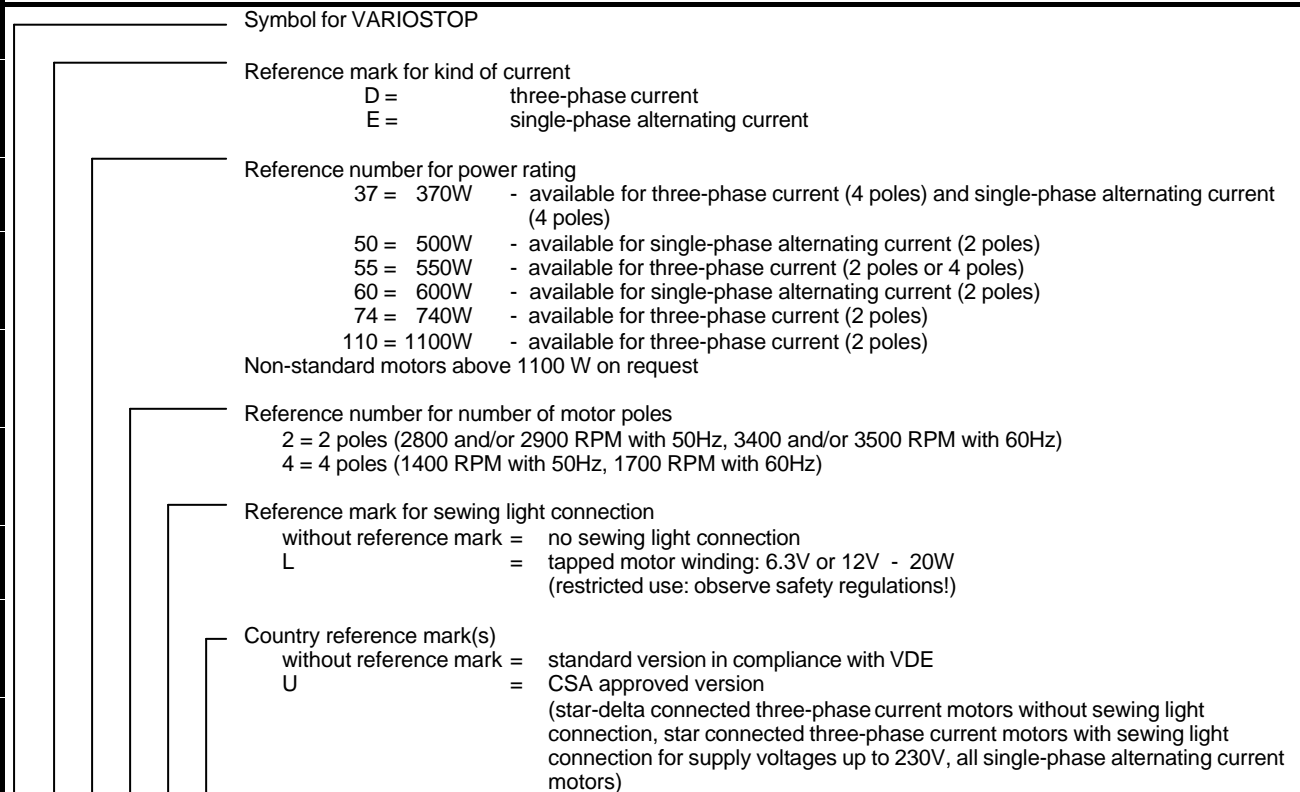

V D 55 2 L U