

MINI-STOP

QE3760

CE

Type

P40MS

Instruction Manual

Part 2

QUICK-ROTAN Elektromotoren GmbH
Königstraße 154
67655 Kaiserslautern
Tel: 06 31/2 00 38 80
Fax: 06 31/2 00 38 62

Part 2

7.	Description of the MINI-STOP drive system	7.1 - 7.4
7.1	Motor QE 3760	
7.2	Control system	
7.3	Speed control unit SWG2	
7.4	External operator panel OC-TOP	
8.	Application	8.1 - 8.6
8.1	Sewing without an external operator's control panel	
8.2	Sewing with the external operator's control panel B2	
8.3	Sewing with external operator's control panel OC-TOP	
8.3.1	Sewing without sewing program (manual sewing)	
8.3.2	Sewing with sewing program (programmed sewing)	
8.3.3	Backtack/darning programs	
8.4	Error messages (malfunction diagnostics)	
9.	Programming by the user	9.1 - 9.8
9.1	User programming with operator panel OC-TOP	
9.1.1	Direct programming	
9.1.2	Parameter programming	
9.1.2.1	Programming level A (operator level)	
9.1.2.2	Programming level B (technician level)	
9.1.2.3	Programming level C (special level)	
9.1.3	Reset	
9.2	User programming without the operator control panel OC-TOP	
9.2.1	Conditions for programming	
9.2.2	Switching on the programming mode	
9.2.3	Concluding the programming procedure	
9.2.4	Reset	
10.	Start of operation	10.1 - 10.8
10.1	Start of the operation with the external operator's control panel OC-TOP	
10.1.1	Control of the direction of rotation	
10.1.2	Control of the needle positions (NP1 / NP2 / NP3)	
10.1.3	Control of the positioning (angle) for thread trimming (NP5(<705>)/NP6(<706>))	
10.1.4	Control of the maximum speed	
10.2	Start of operation without OC-TOP control panel	
10.2.1	Control of the direction of rotation	
10.2.2	Control of the needle positions (NP1 / NP2 / NP3)	
10.2.3	Control of the positioning (angle) for thread trimming (NP5(<705>)/NP6(<706>))	
10.2.4	Control of the maximum speed	
10.3	Hardware test	

Technical updatings reserved!

7. Description of the MINI-STOP Drive System

The MINI-STOP Drive System is an electronically commutated, brushless DC motor.

The system is composed of the following subassemblies

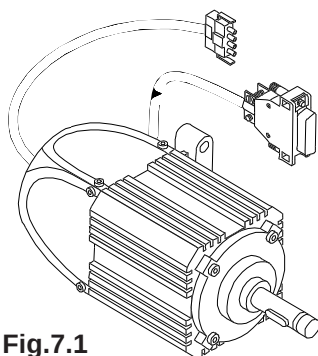


Fig.7.1

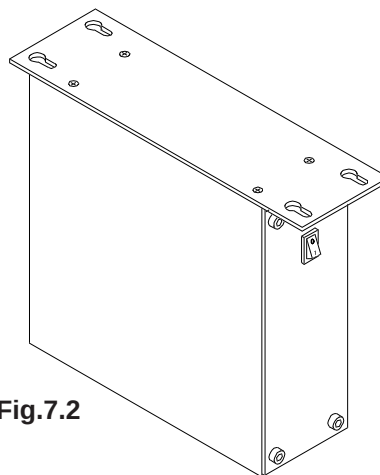


Fig.7.2




Fig.7.3

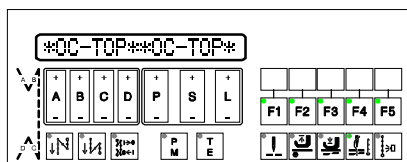


Fig.7.4

Motor QE3760 (Fig.7.1) with integrated optoelectronic incremental encoder for commutation and positioning.

Control (Fig.7.2) with

- integrated mains switch
- mains connection with interference rejection circuit
- electronically controlled combinational circuit
- intermediate DC circuit
- motor-driven current inverter
- electronic control for motor control and machine specific functions

Speed control unit SWG2 (Fig.7.3)

Control panel OC-TOP (Fig.7.4 - optional)

7.1 Motor QE3760

The motor is a synchronous motor. It has a permanent-magnetic rotor, a stator with three-phase winding and an optoelectronic increment encoder for commutation and positioning.

The rated capacity of the motor (shaft capacity) is 370 W in S5 mode. The rated speed of the motor is 6000 rpm, the maximum speed is 9000 rpm.

The motor has two mains leads:

- four-wire with special quadripolar AMP plug (X1) for connecting the stator coil to the control system
- six-wire shielded with nine-pole D-sub plug (X2) for connecting the increment encoder to the control system.

7.2 Control system

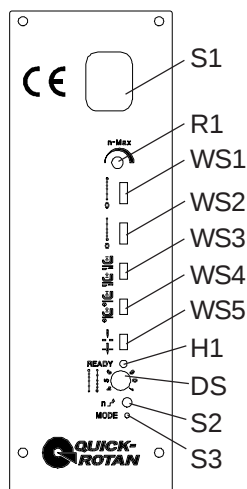


Fig. 7.5

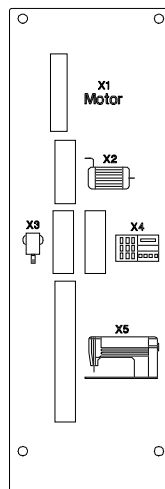


Fig 7.6

The control box is attached to the underside of the machine table by means of the four enclosed screws.

The mains connection is single-phase, using the three-wire cord protruding from the rear and a standard safety plug.

The control system has peripheral functions

on the front panel (Fig. 7.5):

1 mains switch	S1
5 selector switches	WS1 for front backtack (none, single, double) WS2 for end backtack (none, single, double) WS3 for presser foot position after seam end (down, up) WS4 for presser foot position at sewing stop (down, up) WS5 for needle position at sewing stop (down, up)
1 rotary switch	DS for programming bartack stitching, needle positions and maximum speed
2 buttons	S2 ($n \nearrow$) for setting the rotational speed S2 (MODE) for programming the needle position and maximum speed
1 LED	H1 (READY) for indicating readiness for operation

on the rear panel (Fig. 7.6):

sockets or connector plugs

- X1** quadripole socket for connecting the motor's stator coil
- X2** nine-pole D-sub jack for connecting the motor's increment encoder
- X3** nine-pole D-sub plug for connecting set point adjuster SWG2 (Art. No. 63.012)
- X4** nine-pole D-sub plug for connecting the control panel OC-TOP/AP (Art. No. 64.175)
- X5** 37-pole D-sub jack for connecting the process control system (keys, switches, solenoids, solenoid valves) on the machine.

The control system is connected with the sewing machine/ sewing equipment via:

inputs (Ex), such as for keys, switches, proximity switches, monitors, and

outputs (Ax), such as for solenoids, solenoid valves, signal indicators.

Inputs (Ex)

E1:	Feed reverse (manual backtack)	
E2:	Needle position change-over	if <616> = I ¹⁾
	Needle up without trimming	if <616> = II
E3:	Single stitch	if <617> = I
	Backtack function changeover	if <617> = II
E4:	Stop/ start lock	if <624> = I
	Presser foot	if <624> = II

¹⁾ <616> = I means that parameter 616 (the parameter number 616) is set to „I“.
<616> = II means that parameter 616 (the parameter number 616) is set to „II“.

Outputs (Ax)

A1:	Pneumatic thread trimmer
A3:	Thread wiper
A4:	Presser foot lift
A5:	Feed reverse

7.3 Speed control unit SWG2


The SWG2 is attached to the underside of the machine table with the enclosed brackets and connected mechanically to the machine's pedal by means of the enclosed rod assembly.

The mains connection of the SWG2 is by means of a nine-pole connector on plug X3 on the rear control panel.


The SWG2 is an analogous mechatronic converter, which converts the pedal path into analog voltage. This analog output voltage of the SWG2 is digitized in the control system so that the pedal path can be divided into 16 steps (positions).

Position	Meaning
full-speed reverse (-2)	end of seam, cut
slow reverse (-1)	ventilate presser foot
zero position (0)	
slow forwards (+1)	lower presser foot
forward 2 (+2)	speed 1 (minimum)
forward 3 (+3)	speed 2
forward 12 (+12)	speed 11
full-speed forward (+13)	speed 12 (maximum)

Pin connection of speed control plug (X3) of the SWG2



7.4 External operator panel OC-TOP

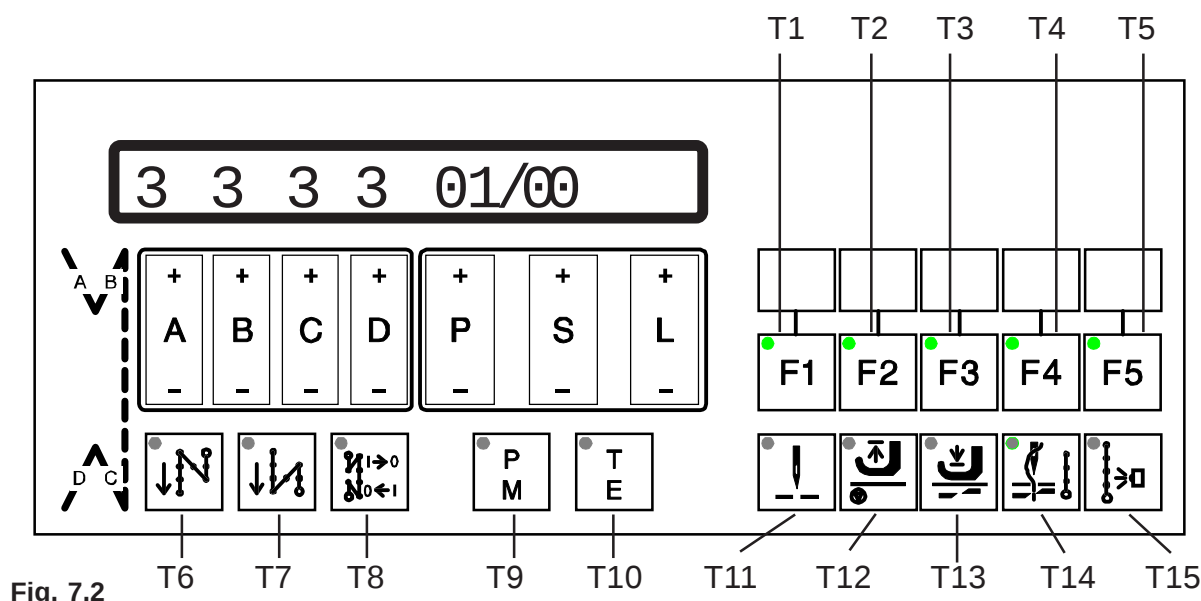

The operator panel OC-TOP (Fig. 7.2) has the following components:

- a display: 16-digit LCD matrix
- 14 programming keys:
 - A+ / A-, B+ / B-, C+ / C-, D+ / D-, P+ / P-, S+ / S-, L+ / L-
- 2 keys for operating mode selection:
 - T9 (P/M) for change-over between programmed or manual sewing
 - T10 (T/E) for change-over between programming or sewing
- 8 keys with specified functional contents:
 - T6 for front backtack (on/off)
 - T7 for end backtack (on/off)
 - T8 for backtack inversion
 - T11 for needle position at sewing stop (up/down)
 - T12 for presser foot position at sewing stop (up/down)
 - T13 for presser foot position after seam end (up/down)
 - T14 for thread trimming (on/off)
 - T15 for sewing with light barrier (on/off)
- 5 keys (T1 ... T5) with their functional signification being specified by the control program (control software)
 - Meaning of keys T1 to T4 if key T5 is not pressed (dark):
 - T1 (F1) for linking seam sections (with/without)
 - T2 (F2) for speed control
 - constant (automatic) or
 - variable (treadle-controlled)
 - T3 (F3) feed reverse for a seam section
 - T4 (F4) seam section manual or stitchcounted
 - Meaning of keys T1 to T4 if key T5 is pressed (bright):
 - T1 currently no function
 - T2 currently no function
 - T3 single stitch
 - T4 unit count in display
- outlet for two light barriers on the rear of the OC-TOP

The keys T1 ... T15 are provided with one signal lamp each (LED). Each LED provides optical feedback on the control position of the function assigned to each key. If the function is ON, the LED is bright; if the function is OFF, the LED is dark.

8. Application

This MINI-STOP drive can be used either with or without an external operator's control panel (OCP).

The following external operator's control panels can be used:

- OCP B2
- OCP OC-TOP

Switching on

The on/off switch (mains switch) S1 is located at the front of the control unit. When activated and live, switch S1 is lit up.

Readiness for operation

The green „READY“ LED (H1) is located at the front of the control unit.

When this is continuously lit, the drive is ready for operation.

A flashing LED means that there is a malfunction (error) in the drive.

The malfunction is to be found under error messages 62 (see Sect. 8.4)

When the drive is switched off at the mains, the LED likewise starts to blink.

The LED goes off when the control unit is no longer live.

Maximum speed

The maximum speed can be adjusted:

either with control panel OC-TOP by means of parameter <607>

or without control panel by means of button S2 at the front of the control unit.

The maximum speed can be reduced by means of potentiometer „n-max“ (R1) at the front of the control unit.

8.1 Sewing without an external operator's control panel

When working without an external operator's control panel the switches **WS1** to **WS5** and **DS** are used.

The following functions can be called up via these switches:

WS1: Initial backtack: without / single / double

WS2: End backtack: without / single / double.

WS3: Presser foot position (up/down) after seam end

WS4: Presser foot position (up/down) when stopping before seam end

WS5: Needle position (up/down) when stopping before seam end

DS: number of stitches for front backtack and end backtack

8.2 Sewing with the external operator's control panel B2

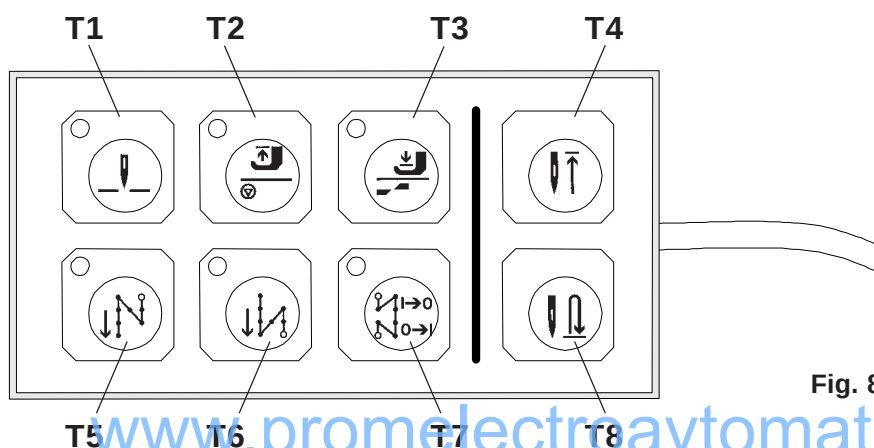


Fig. 8.1

If the MINI-STOP is used with the OCP B2, then only the manual sewing work option is available.

The following functions can be called up via the keys of the OCP B2:

- T1:** Needle position when the machine stopped before end of the seam
up: (LED switched on)
down: (LED switched off)
- T2:** Position of the presser foot when the machine is stopped before the end of the seam
up: (LED switched on)
down: (LED switched off)
- T3:** Position of the presser foot after the end of tkō seam
up: (LED switched on)
down: (LED switched off)
- T4:** Needle up without trimming
- T5:** Initial backtack
on: (LED switched on)
off: (LED switched off)
- T6:** End backtack
on: (LED switched on)
off: (LED switched off)
- T7:** Backtack inversion or elimination
If this key is pressed (LED switched on), before the start of the seam length, then from the start of the seam length the opposite function to what is indicated on key T5 will be effected.
- If this key is pressed during sewing (LED switched on) then the opposite function to what is indicated on key T6 will be effected at the end of the seam length.
- T8:** Single stitch
When this key is pressed, the machine will perform one extra stitch.

The actual position of each function is indicated by the LEDs which are built into each key.

The type of backtack - single or double - will be chosen by the selector switches WS4 and WS5 at the front of the control box.

The other function selecting switches (WS1, WS2, WS3) at the front of the control box are without effect.

Indication of defective functions at the OCP B2:

Functions that are inoperative or defective in the drive or only in the control box will be indicated via the LEDs in the keys.

There are two signal positions which indicate these malfunctions :

- a) The 3 upper LEDs and the 3 lower LEDs blink alternatively.
The malfunction is in the area of malfunction number < 63 (see section 8.4).
- b) All 6 LEDs blink at the same time.
The malfunction is in the area of malfunction number > 64 (see section 8.4).


8.3 Sewing with external operator's control panel OC-TOP

8.3.1 Sewing without Sewing Program (manual Sewing)

Condition: key T9 (P/M) is dark
key T10 (T/E) is dark

Display showing

- before start or after start, when <605> = II

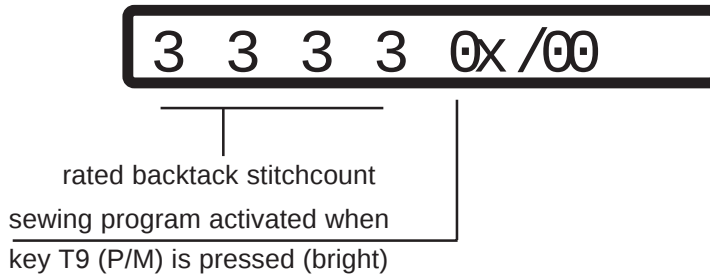


Setting of rated backtack stitchcount is possible only with the machine at standstill

for front backtack forward with key A+ or
key A-,
for front backtack backward with key B+ or
key B-,
for end backtack backward with key C+ or
key C-,
for end backtack forward with key D+ or
key D-.

Display showing


- before start, when <605> = I

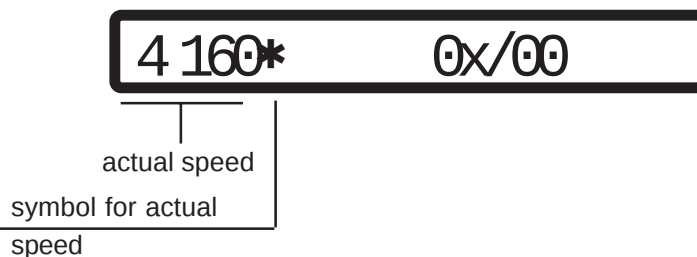

8.3.2 Sewing with sewing program - (programmed sewing)

Condition: key T9 (P/M) is bright
key T10 (T/E) is dark


Display showing before start

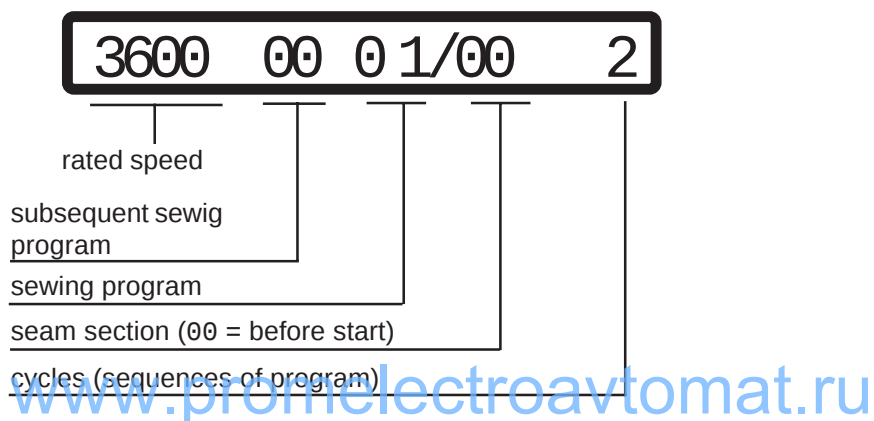

When this is displayed, the following can be modified:

- program: by actuating key P+ or P-
- seam section: by actuating key S+ or S-
- cycles: by actuating key L+ or L-
- the subsequent sewing program via key D+ or D-
- rated speed for the program: by actuating key A+ or A-
This speed is limited by parameter <221>


Display before start if a seam section has been activated

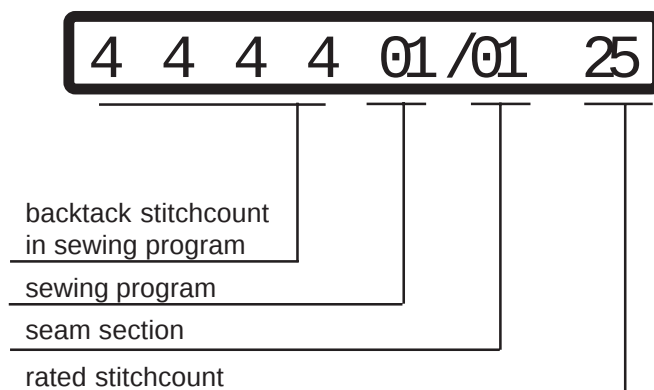


When this is displayed, the following can be modified:

- the preset backtack stitchcount for the program by actuating the keys located below the respective digits
- rated stitchcount of a seam section: by actuating key L+ or L-
- program: by actuating key P+ or P-
- seam section: by actuating key S+ or S-

Display showing after start, when <605> = II

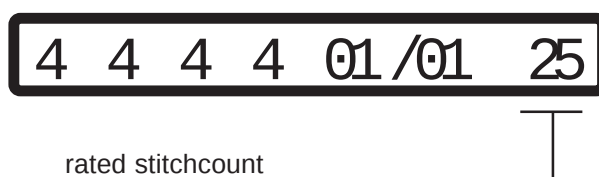

Display showing after start, when <605> = I

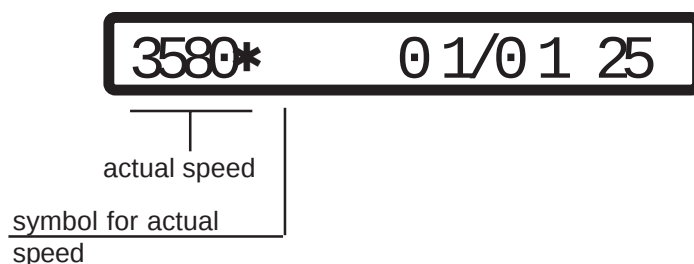

Sewing programs

- a) 5 sewing programs can be used
- b) The sewing programs comprise up to 5 seam sections
- c) Each seam section can comprise up to 99 stitches
- d) The following functions can be assigned to each seam section:

front backtack	via key T6
end backtack	via key T7
needle position at sewing stop	via key T11
presser foot position at sewing stop	via key T12
presser foot position after completion of seam section	via key T13
thread trimming	via key T14
feed reverse	via key T3
- e) Linking consecutive seam sections can be made via key T1
- f) Sewing speed can be chosen to be either constant (automatic) or variable (treadle-controlled) via key T2.
- g) The stitchcount of a seam section can be interrupted via treadle position -2. This condition is signalled by the letter M shown in the display. Manual sewing (without stitchcount) is now possible until the seam section is completed by renewed treadle position -2 and the program advancing to the subsequent seam section.
- h) Seam sections can also be performed without stitchcount; stitchcount deactivation is made via key T4
- i) In sewing with light barrier control, the rated stitchcounts stored for the seam section are light barrier compensation stitches.
- j) It is possible to run several sewing programs consecutively.
During programming, the subsequent program is displayed by digits 6 and 7 and can be entered via key D+ and D-.
00 means that the current program will be performed exclusively; at its end return is made to its start.
- k) The programs can be used as backtack/darn programs
Change-over is made via parameter <313>

8.3.3 Backtack/Darning programs

- The sewing programs are turned into backtack/darning programs when parameter <313> = 1.
- In each program, only seam sections 1 and 2 become active, section 1 being sewn forward and section 2 backward.
- The cycle counter (shown on the righthand side of the display above keys L+/L- before sewing start) determines the number of backtacks (single, double, 3 times, 4 times).
- The darning program is a special backtack program.
In this case, reset the cycle counter to "0".
- Seam end is initiated in the darning program by treadle position "-2".
- Five backtack/darning programs are available.
- Each program has one of the five function keys T1 ... T5 assigned to it

- The activated program is indicated on the display above keys P+/P- and/or by the assigned key T1 ... T5 being luminous.
- On the lefthand side of the display, the preset maximum speed possible in the program is shown before sewing start. This speed can be varied via the keys A+/A- and can be limited via parameter <221>.
- The backtack/darning programs can be operated either at variable (treadle-controlled) or constant speed (not controlled by the treadle).
- Sewing at constant speed:
With <313> = II, switch on key T2 (luminous) during the seam sections, subsequently set <313> = I; this means backtack/darning program activated.
- Stitch compensation is activated via parameter 304. Its value (<304>) determines delayed deactivation (ms) of the feed reverse after seam section 2.

8.4 Error messages (malfunction diagnostics)

The control system of the drive cyclically tests its own functional condition and the functional condition of the complete drive system.

Malfunctions are signalled via the display of the external operator panel, for instance:



List of possible error codes:

1	Treadle not in zero position when mains power is turned ON
9	Start lock
10	Machine class, <799> was changed; remedy: turn mains power switch OFF and ON again
62	Short circuit on 24 V (32 V) DC
63	Overload on 24 V (32 V) DC, load current > 4 amps
64	Power supply monitor: voltage too low (90 V - 150 V)
65	Power electronics not operational after mains power ON, mains power < 130 V
66	Earth short (motor or motor supply line has earth short in one or more phases)
67	Internal malfunction
68	Power electronics shut-off
	a) Overcurrent, short circuit in mAdor or supplyline
	b) Overvoltage, mains voltage too high (>300 V), motor overloaded while decelerating
	c) Undervoltage
70	Machine blocked, no increment from synchronizer at max. motor torque
71	Commutation transmitter plug not inserted
73	Motor overloaded
75	Internal malfunction
90	EEPROM does not exist
91	EEPROM not programmable
92	Start lock while motor running
93	Wrong EEPROM
100	Internal malfunction
117	

In case of error messages ≥ 62 , the motor will stop in undefined positions.

Control system reset possible only by mains power OFF/ON.

www.promelectroavtomat.ru

9. Programming by the user

Enables machine functions and parameters to be switched on or set up.

The **MINI-STOP** is user-programmed by means of the external control panel **OC-TOP**

Without the **OC-TOP** external control panel, user-programming is possible for only a few selected functions.

The user programming of the **MINI-STOP** is possible by means of an external operator's control panel via:

- direct programming (only with drives from function level 40) and/or
- programming parameters.

The programming of parameters is possible via three levels of program:

- Programming on level A (operator level)
- Programming on level B (technician's level)
- Programming on level C (special level)

9.1 User programming with operator panel OC-TOP

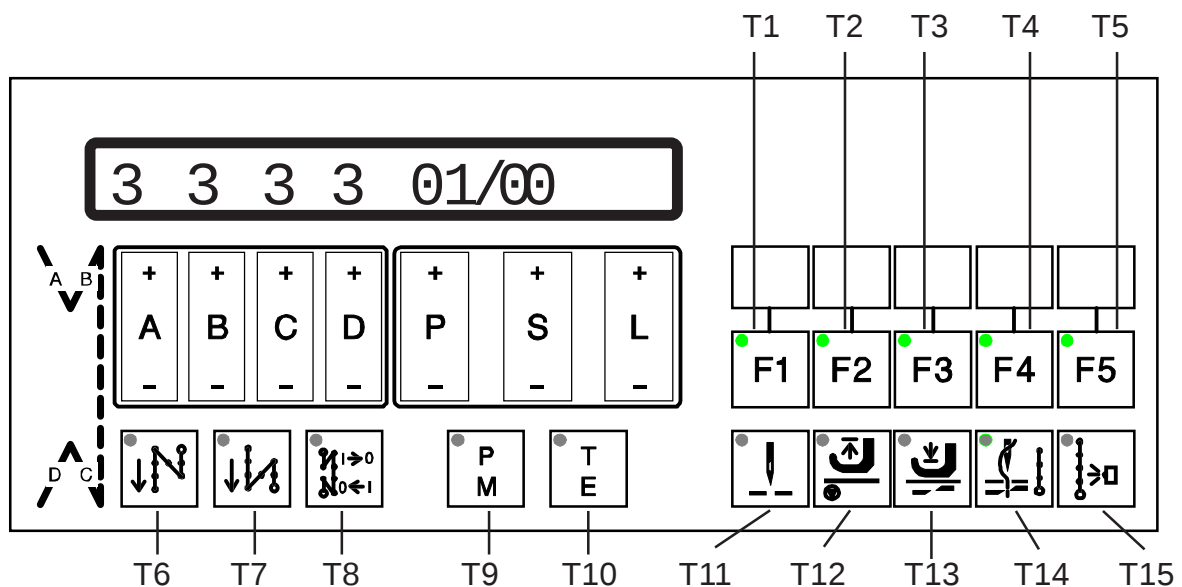


Fig. 9.1

9.1.1 Direct programming

Attention! All values modified within direct programming are stored only when
a) the drive system is started or
b) key T9 (P/M) are pressed.
If the drive system is switched off via the mains power switch immediately after any values were modified, the values set before modification will be retained!

Regardless of the programming levels, certain values can be programmed without calling up parameter numbers - i.e. directly.

The following values can be modified by direct programming:

Front backtack stitchcount forward
Front backtack stitchcount backward
End backtack stitchcountbackward
End backtack stitchcountforward
Stitchcounts for seam sections
Speeds for seam sections
Functions for seam sections

a) Modification of backtack stitchcounts

Display shown when "manual sewing" is ON (T9 (P/M) and T10 (T/E) not luminous)



3 3 3 3 0x/00

Display shown when "programmed sewing" is ON (T9 (P/M) luminous, T10 (T/E) not luminous)



4 4 3 3 0x /01 25

The symbolic seam pictogram on the lefthand side of the operator panel shows the backtack sections

A: Front backtack forward
B: Front backtack backward
C: End backtack backward
D: End backtack forward

Immediately below the display, there are keys


A+/A- for backtack section A,
B+/B- for backtack section B,
C+/C- for backtack section C,
D+/D- for backtack section D

These keys permit to increase or decrease the backtack stitchcounts.

b) Programming of the stitchcount for a seam section

Condition: Operation mode „programmed sewing“ is on, i.e. key T9 (P/M) is bright and key T10 (T/E) is dark, machine not sewing

Display showing

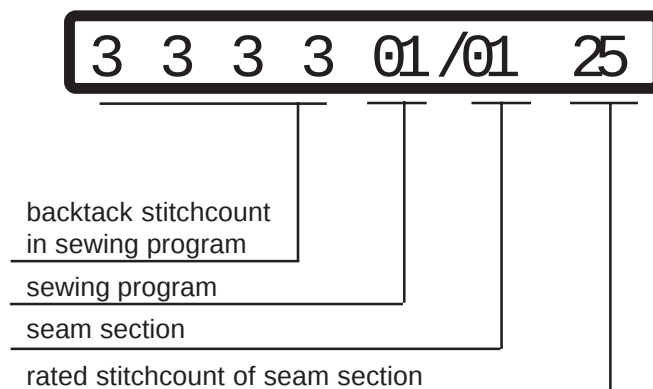

Activation of a sewing program is made via keys P+ or P-

Activation of a seam section is made via keys S+ or S-

Programming of the stitchcount for the seam section is made via key L+ (value increased) or L- (value decreased)

c) Programming of seam sections by „Teach-in“ (performing work)

Condition: Key T9 (P/M) is bright
Key T10 (T/E) is bright

The machine must have performed at least one stitch before.

Activate the desired program in the display via keys P+ or P- and the seam section to be programmed via keys S+ or S-.

Cycle:


- Treadle forward
Reaction: the stitchcount which has been registered up to now will be eliminated
- Treadle returns to zero position
- Treadle forward
Reaction: machine sews, the sewed stitches will be added in, shown in the display and registered

Correction of the value shown in the display is possible via key L+ or L-.

d) Programming of cycles (number of sequences of program), of program speed and of the subsequent program

Condition: Operation mode „programmed sewing“ is on, i.e. key T9 (P/M) is bright and key T10 (T/E) is dark, machine not sewing

Display showing

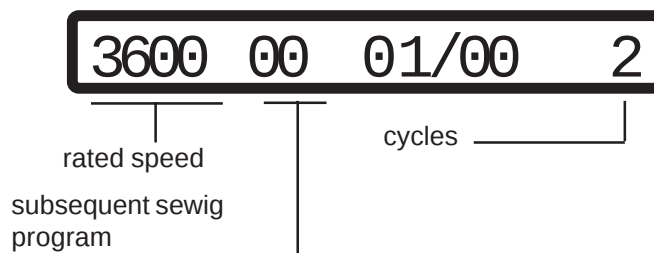

Cycle programming is made via the keys L+ (number increased) or L- (number decreased)

Programming of the speed for the program is made via key A+ (value increased) or A- (value decreased) This speed is limited by parameter <221>

Programming of the subsequent sewing program is made via keys D+ or D-.

e) Programming of functions

Functions for the seam sections are controlled via the functional keys

T6	Front backtack or start stitch condensation (with/without)
T7	End backtack or end stitch condensation (with/without)
T11	Needle position at sewing stop and at the end of a seam section (up/down)
T12	Presser foot position at sewing stop (up/down)
T13	Presser foot position at the end of a seam section (up/down)
T14	Thread trimming at the end of a seam section (with/without)
T15	Sewing with light barrier (with/without)
T1	Linking of seam section (with/without), if T5 is dark
T2	Speed control, if T5 is dark variable (treadle-controlled, T2 is dark) or constant (automatic, T2 is bright)
T3	Transport reverse or stitch condensation of a seam section, if T5 is dark
T4	Seam section manual or stitchcounted, if T5 is dark

9.1.2 Parameter programming

9.1.2.1 Programming level A (operator level)

This level is used for programming control parameters which immediately affect the operation sequence.

These are the parameters for the following functions:

- Front backtack (double or single)	<148>
- End backtack (double or single)	<149>
- Backtack (standard backtack or decorative backtack)	<523>
- Light barrier compensation stitches	<111>
- Light barrier fade-out	<112>
- Softstart	<116>

a) Activation of programming level A

Conditions

Mains power switch ON

Drive system not running

Operating mode: manual sewing must be ON (key T9 (P/M) dark)



Press key T10 (T/E)

Response:

Key T10 (T/E) becomes bright, the display shows in its righthand half the first parameter (parameter no. and parameter value) associated with programming level A.

Sewing is not possible



- Programming
The parameter number is set by using keys P+ or P- (hundreds of parameter no.) and keys S+ or S- (tens and units of parameter no.). The parameter value is programmed by using key L+ or L-

b) Deactivation of the programming level A

Press key T10 (T/E)

Response:

Key T10 (T/E) goes dark, the display returns to initial condition.
Sewing is possible.



9.1.2.2 Programming level B (technician level)

This level is used for programming the control parameters which have to be modified or adapted very rarely or only for starting operation of the system.

a) Preparation for activation of the programming level B

Turn mains power switch OFF

Press and hold keys T9 (P/M) and T10 (T/E) simultaneously

Turn mains power switch ON

Release keys

Response:

The display shows a „*“ between program and seam section.
Sewing is possible.



b) Activation of programming level B

Press key T9 (P/M) (not becoming bright) and press key T10 (T/E) (becoming bright)

Response:

In the righthand half of the display are shown: a parameter number (at first 104, then the number selected last) and the associated value.

Sewing is not possible.



Modification of parameter number:

for hundreds of parameter numbers use key P+ or P-

for tens and units of parameter numbers use key S+ or S-

Modification of parameter value: via key L+ or L-

c) Deactivation of programming level B

Press key T10 (T/E) (not becoming bright)

Response:

Parameters shown disappear from the display, the display returns to initial condition
Sewing is possible.



9.1.2.3 Programming level C (special level)

At this level, control parameters are stored the values of which have to be modified in exceptional cases only. Correction of these parameters should therefore be made only after consultation of the manufacturer.

Activation of programming level C

- a) Activate programming level B (see 9.1.2.2)
- b) Call up parameter 798
- c) Set parameter value <798> to I
- d) Deactivate programming level B
- e) Turn mains power switch OFF, wait for >2 secs. to elapse
- f) Turn mains power switch back ON
- g) Press key T10 (T/E) (becoming bright)

Response:

In the righthand half of the display appears the first parameter of programming level C.

Calling up further parameter numbers and correcting the parameter values can be made in the same way as described for programming levels A and B.

Deactivation of programming level C:

- Press key T10 (T/E) (not becoming bright)
- Turn mains power switch OFF

9.1.3 Reset

a) Reset of parameter values

All parameter values having been modified from the ex-factory condition (standard value) are reset to their standard values by this procedure.

Exceptions: parameters 700, 799 and 800
For these parameters, the values programmed by the user are retained even after
-Reset- has been performed.

-Reset- procedure:

- turn mains power switch OFF
- press treadle fully forward and hold in that position

- press and hold keys P- or P+, S- or S+ and L- or L+ simultaneously
- turn mains power switch ON
- release the three keys and the treadle

Response: Display showing

RESET Y - - N

Now -Reset- can be performed.

Located below the display Y (yes) there is key P+. Press this key P+ to start the reset. The display briefly shows:

MASTE R-RE SET

After that the display shows the power-on display for approx. 2 secs.

X40MS 7Z_C11_4

and then shows the display corresponding to the operating mode selected

3 3 3 3 0x/00

If it is not desired to start the -Reset-, press key L+ located below the display saying N (no).

b) Reset of parameter values and sewing programs

The reset procedure including the data of the sewing programs is analog to that described under a), until the following appears in the display:

RESET Y - - N

In order to reset the data of the sewing programs to their original values, it is now required before pressing key P+ to press at first key T8 and hold until activation is acknowledged in the display.

9.2 User-programming without the OC-TOP control panel

User-programming without the OC-TOP is carried out using the following operating elements on the front control panel:

- rotary switch DS
- button S2 and
- button S3 (MODE)

9.2.1 Conditions for programming

- The drive must be switched on, i.e. LED H1 („READY“) is on
- After switching on, the motor must have rotated at least once
- The motor must not be running
- The OC-TOP control panel must not be connected

9.2.2 Switching on the programming mode

Press button S3 (MODE) for at least one second

Result: the LED H1 („READY“) is blinking, drive is not ready for operation.

The following functions (parameters) can be selected on the DS rotary switch:

Position of DS rotary switch	Meaning / function
1	Direction of rotation (<800>)
2	NP1: needle down (<702>)
3	NP2: take-up lever up (<703>)
4	NP3: Needle up (<710>)
5	NP5: end cutting signal 1 (magn.<705>)
6	NP6: start cutting signal 2 (pneum.<706>)
9	Maximum speed (<607>)

Direction of rotation

The procedure for reversing the direction of rotation is described in section 10.2.1

Needle positions (NP1/NP2/NP3/NP5/NP6)

The procedure for setting the needle position is described in sections 10.2.2 and 10.2.3

Maximum speed

The procedure for checking and correcting the maximum speed (rotational speed) is described in section 10.2.4

9.2.3 Concluding the programming procedure

Press button S3 (MODE) for at least one second

Result: the LED H1 („READY“) lights constantly; drive is ready for operation.

9.2.4 Reset

All parameter values which have been altered can be returned to their original value as set in our factory. To obtain this, proceed as follows:

- switch off the motor
- press the keys S2 and S3 hold it in the pressed position while switching on the drive, when the LED H1 („READY“) is switched on, the "RESET" is finished.
- release keys

Result: all parameters are reset except for <700>, <799> and <800> which remain unaltered

www.promelectroavtomat.ru

10. Start of operation

If the MINI-STOP has been stored at a temperature of $<+5^{\circ}\text{C}$, then a working temperature of between $+5^{\circ}\text{C}$ and $+40^{\circ}\text{C}$ must first be obtained.
The equipment must be dry.

Before work with the machine can be started, make sure to perform the following:

- a) Control the direction of rotation
- b) Control the needle positions
- c) Control the maximum speed

10.1 Start of the operation with the external operator's control panel OC-TOP

10.1.1 Control of the direction of rotation

- a) Activate programming level B (technician level) (see section 9.1.2.2 „programming level B“)
- b) Actuate treadle briefly forward:
Reaction: The machine performs a full revolution and then positions in a random position.
- d) Is the direction of rotation correct?
When yes, then make the control of the needle positions (see section 10.1.2)
If no, then activate parameter 800 and change the value $<800>$ ($\text{I} \rightarrow \text{II}$ or $\text{II} \rightarrow \text{I}$) than proceed as b)

10.1.2 Control of the needle positions (NP1 / NP2 / NP3)

NP1 - needle down position $<702>$
NP2 - thread take up lever in the up position $<703>$
NP3 - needle up $<710>$

- a) Activate programming level B (technician level) (see section 9.1.2.2 „programming level B“)
- b) Activate parameter 702
- c) Actuate the treadle briefly forward
Reaction: The machine performs a revolution and then positions at the programmed $<702>$.
- d) Is the needle position correct?
When yes, then proceed as with g) below.
When no, then the position must be changed by turning the hand wheel (when $<701> = \text{I}$) or via key L+ or L- (when $<701> = \text{II}$)
- e) Actuate the treadle briefly forward
Reaction: The machine performs a revolution and positions in the same position.
- f) The position can again be corrected.
When no further correction is needed, then proceed as with g) below.
- g) As soon as another parameter number is called up, e.g. example 703, the previously programmed value of $<702>$ is memorized.
- h) With parameter 703 and 710 correction is obtained as described above for parameter 702.
- i) Deactivate programming level B (see section 9.1.2.2 „programming level B“).

10.1.3 Control of the positioning (angle) for thread trimming (NP5 (<705>) / NP6 (<706>))

- a) Activate programming level B (technician level) (see section 9.1.2.2 „programming level B“)
- b) Set parameter 705
- c) Actuate the treadle briefly forward
Reaction: The machine performs a revolution and positions at the indicated <705>.
- d) Is the position correct?
When yes, then proceed as g) below.
When no, then the position must be corrected by turning the hand wheel (when <701> = I) or via keys L+ or L- (when <701> = II).
- e) Activate the treadle forward.
Reaction: The machine performs a revolution and positions at the corrected program value <705>.
- f) The position can again be corrected.
If no further correction is needed, then proceed as g) below.
- g) Back heel the treadle.
Reaction: The machine rotates to NP2, <705> is memorized, programming (correction of position) is no longer possible.
- h) If the treadle is back heeled then the thread trim procedure will be activated and the machine performs one revolution.
- i) Should parameter <705> be changed again, then the sequence from c) above must be repeated. In any other event, call up parameter 706 and repeat the sequence from c) above.
- j) Deactivate program level B (see section 9.1.2.2 „programming level B“).

10.1.4 Control of the maximum speed

- a) Activate programming level B (see section 9.1.2.2 "programming level B")
- b) Set to parameter 607
- c) Check the parameter value <607> and make correction if necessary via keys L+ or L-
- d) Deactivate programming level B (see section 9.1.2.2 "programming level B")

10.2 Start of operation without OC-TOP control panel

Procedure:

- Switch on mains switch S1
- LED displays „READY“
- OC-TOP is not connected
- Push the pedal forwards so that the motor turns over at least once
- Push button S3 (MODE) with a suitable implement (e.g. the tip of a ball-point pen) for at least one second

Reaction: LED H1 („READY“) flashes

Direction of rotation, needle positions and maximum speed can be controlled and, if necessary corrected, by turning rotary switch DS.

Position of DS rotary switch	Meaning / function
1	Direction of rotation (<800>)
2	NP1: needle down (<702>)
3	NP2: take-up lever up (<703>)
4	NP3: Needle up (<710>)
5	NP5: end cutting signal 1 (magn.<705>)
6	NP6: start cutting signal 2 (pneum.<706>)
9	Maximum speed (<607>)

10.2.1 Control of the direction of rotation

- Turn rotary switch DS to position 1
- Push the pedal lightly forwards
Reaction: machine starts and takes up an undetermined position
- Is the direction of rotation correct?
If yes, check the needle position (section 10.2.2)
If no, push button S2.
Result: The direction of rotation has changed. Continue (check) with b).

10.2.2 Control of the needle positions (NP1 / NP2 / NP3)

- Turn rotary switch DS to the position which corresponds to the needle position being checked (see section 10.2).
- Actuate the treadle briefly forward:
Response: The machine starts running and then positions
Programming (position correction) is possible
- Was the needle position correct?
If yes, proceed under g)
If no, correct the position by turning the handwheel
- Actuate the treadle briefly forward:
Response: The machine performs a full revolution and then positions in the same position
- The position can be corrected again
- If no further correction is required, finish programming
Press key S3 (MODE) for at least one second
Result: the LED H1 („READY“) lights constantly; drive is ready for operation.

The selected position has been stored.

www.promoelectroavtomat.ru

10.2.3 Control of the positioning (angle) for thread trimming (NP5(<705>)/NP6(<706>))

- a) Turn rotary switch DS to the position which corresponds to the needle position being checked (see section 10.2).
- b) Actuate the treadle briefly forward:
Response: The machine starts running and then positions according to the values stored for <705> or <706>
- c) Was the position correct?
If yes, proceed under g)
If no, correct the position by turning the handwheel
- d) Actuate the treadle briefly forward:
Response: The machine performs a full revolution and then positions in the corrected position
- e) The position can be corrected again
If no further correction is required, proceed under g)
- f) Actuate the treadle backward
Response: Machine positions in NP2, position correction is no longer possible
- g) Actuate the treadle backward
Response: Machine performs a full revolution, the thread trimmer mechanism is activated. This procedure can be repeated various times.
- h) Is further position correction required?
If yes, proceed under b)
If no, deactivate the programming mode: Press key S3 (MODE) for at least one second
Result: the LED H1 („READY“) lights constantly; drive is ready for operation.

The selected position has been stored.

10.2.4 Control of the maximum speed

- a) Turn rotary switch DS to position 1
- b) Press pedal forwards as far as it will go and keep it in this position
Reaction: rotational speed is set to 500 rpm.
- c) Briefly push key S2
Each time key S2 is pushed, the speed increases by 100 rpm. Press key S2 repeatedly until the desired speed has been reached.
- d) Do not press the pedal. When the pedal is in the zero position, the rotational speed last set will be saved.
- e) Press key S3 (MODE) for at least 1 second
Result: LED H1 („READY“) flashes, drive is ready.

10.3 Hardware Test

Hardware Test is a check routine permitting to use the operator panel OC-TOP for testing various components of the drive system (control system) and of the machine installation.

Hardware testing is made via test blocks. These are called up consecutively via key A+ or A-.

Activation of the „hardware test“ routine

- a) Activate programming level „B“ and call up parameter 797
- b) Set <797> to I
- c) Deactivate programming level „B“
- d) Turn mains power switch OFF
- e) Wait for approx. 2 secs. to elapse, and turn mains power switch back ON

Response: The display shows „HARDWARE TEST“ for approx. 2 secs.

After that, the display shows the first test block: Inputs.
All OC-TOP keys equipped with LEDs become bright

Survey of test blocks:

Test Block	Check	Display
1	Inputs	E01 0 X 1 : 5
2	Outputs	A02 0 X 2 : 4
3	Speed control unit	SWG 0
4	Synchronizer	IWG 000 0
5	Potentiometer	R1 xxx%
6	Selectors	WS1 - 5 00000
7	Miniature Programming Field	MPF H 1 0
8	Lightbarrier	LS1 0 LS2 0

To call up the test blocks (advancing from test block to test block), use keys A+ and A-.


www.promelectroavtomat.ru

To call up various functional elements within a test block (advancing from functional element to functional element), use keys B+ and B-.

To activate functional elements selected, use key D+

Test block 1: Inputs

Display:

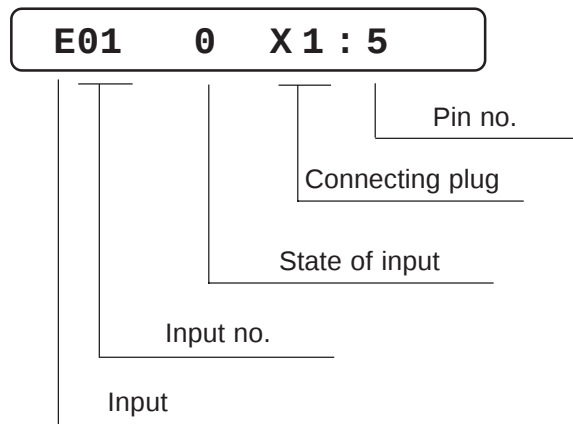

The function assigned to the input displayed can be seen from chapter 12 „Connections Diagram for Connectors“.

The designations E (for input) are located on the lefthand side of the connectors shown.

The keys or selectors assigned to the inputs are designated S in the connections diagram and have the same numbers as the associated inputs, i.e.

key S1 is connected to input E1

key S2 is connected to input E2

key Sx is connected to input Ex.

The operating state of the input is signalled in the 7th digit of the display.


Key/switch open → display: 0

Key/switch closed → display: 1

In the righthand part of the display, the connecting plug and the pin number to which the displayed input is connected are shown for the purpose of reference.

Test block 2: Outputs

Display:

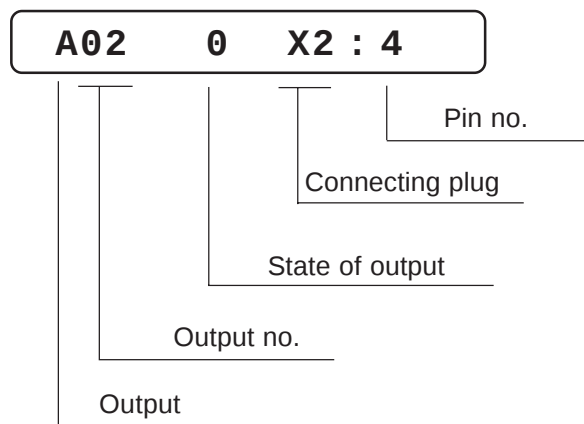

The function assigned to the output displayed can be seen from chapter 12 „Connections Diagram for Connectors“.

The designations A (for output) are located on the lefthand side of the connectors shown.
The solenoids/solenoid valves assigned to the outputs are designated Y in the connections diagram and have the same numbers as the associated outputs, i.e.
solenoid Y2 is connected to output A2
solenoid Y3 is connected to output A3
solenoid Yx is connected to output Ax

The operating state of the output displayed is signalled in the 7th digit of the display.

Output not activated → display: 0

Output activated → display: 1

To activate an output, use key D+. Deactivation is made automatically after approx. 2.5 secs have elapsed or can be caused by using key D-.

In the righthand part of the display, the connecting plug and the pin number to which the displayed output is connected are shown for the purpose of reference.

Test block 3: Speed control unit (SWG)

Display:

SWG 0

The treadle can be actuated to operate consecutively all 16 steps of the speed control unit.

The following is displayed in digits 6, 7 and 8

-2 / -1 / 0 / +1 / 1D / 2D / ... / 12D, when the speed control unit is in proper condition.

Test block 4: Synchronizer (IWG)

Display:

IWG 000

This test block permits to check the synchronizer (increment encoder). For this purpose, the shaft of the motor is rotated manually.

The increments (pulses) of the synchronizer are counted and shown in display digits 7, 8 and 9.
This display runs from 0 through 127 when the synchronizer is in proper condition.

Test block 5: Potentiometer R1

Display

R1 xxx%

This test block permits to check potentiometer R1 on the control box.

The display is in a proportion (%) of total resistance.

Turning the potentiometer axle causes the display to vary from 0 through 100.

Test block 6: Selectors

Display

WS1 - 5 00000

This test block permits to check the 5 selectors (WS1 ... WS5) on the control box.
 The operating state is shown in digits 8 to 12 of the display. Each switch has a display digit assigned to it.
 The operating state is signalled by 0 and 1 for WS1, WS2 and WS3 and by 0, 1 and 2 for WS4 and WS5.

Test block 7: Miniature Programming Field (MPF)

Display:


- a) MPF H 1 0
- b) MPF S 2 0
- c) MPF S 3 0
- d) MPF DS x
- e) MPF ESM 0 X5 : 23

This test block permits to check the components of the miniature programming field (MPF). To advance from display to display (a) → b) → c) ...) use key B+ or B-.

- a) LED H1 (READY)
Switch on with button D+, H1 lights up, 8th digit in the display shows 1
- b) Key S2
The position of the button is shown in the 8th digit in the display
- c) Key S3 (MODE)
The position of the button is shown in the 8th digit in the display
- d) Rotary switch DS
Positions (0 ... 9) of rotary switch DS are shown in the 8th digit in the display
- e) External synchronizing marker
If working with an external synchronizer, its function can be checked.

Test block 8: Ligth barrier

Display:

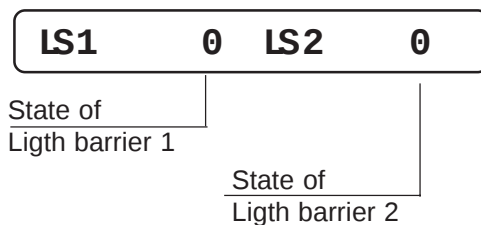

State of display 0: Ligth barrier is clear
 1: Ligth barrier is dark

To deactivate the test routine, turn the mains power switch OFF.